

---

# hotels

2016/2017



It's electric.  
.....

**English**

**BACH  
MANN**

”

*Our goal here at BACHMANN  
is to be a trendsetter and to  
bring innovations to life. We want  
to improve quality of life with our  
solutions – people should feel  
at ease with our technology.*

Peter Bachmann | CEO



# welcome



1 WIRELESS CHARGER PAGE 44

2 PIX PAGE 20



# feel-good oasis





# a flowing current





# bon appétit





# shaping the future



1 HD BASE T PAGE 40

2 CONI DUO PAGE 32







**The magic  
is always  
in the detail.**

Theodor Fontane (German author | 1819–1898)

---

# contents

TWIST **PAGE 18**

---

PIX **PAGE 20**

---

ELEVATOR **PAGE 22**

---

DUE **PAGE 24**

---

POWER FRAME COVER **PAGE 26**

---

POWER FRAME **PAGE 28**

---

KAPSA **PAGE 30**

---

CONI DUO **PAGE 32**

|                      |                |
|----------------------|----------------|
| CONI                 | <b>PAGE 34</b> |
| .....                |                |
| DESK 2               | <b>PAGE 36</b> |
| .....                |                |
| DESK 1               | <b>PAGE 38</b> |
| .....                |                |
| HD BASE T            | <b>PAGE 40</b> |
| .....                |                |
| CUSTOM MODULES       | <b>PAGE 42</b> |
| .....                |                |
| WIRELESS CHARGER     | <b>PAGE 44</b> |
| .....                |                |
| POWER SUPPLY CABLES  | <b>PAGE 45</b> |
| .....                |                |
| SERVICE & PICTOGRAMS | <b>PAGE 46</b> |



# TWIST


TWIST is the ideal power strip for kitchens and offices. With its compact form and low installation depth, it can be easily integrated into worktops. Because the power cable is routed close to the housing, the installation depth is only around 40 mm, meaning that the unit can be easily installed above a drawer.

Various surface versions allow TWIST to fit effortlessly into both classic and modern shape and colour concepts. An ingenious fastening mechanism: after use, simply rotate the cover and the socket outlets disappear underneath it.

## BENEFITS

- **Just 40 mm installation depth**
- **Quick and easy to install**
- **Suitable for retrofitting**
- **KEMA-KEUR approved**

## AWARDS



**Dimensions (H x Ø)**  
42.5 x 115 mm

**Installation depth**  
40 mm

**Cover disc**  
material: Metal  
Socket material: Plastic

**Socket colour**  
Black

**Colour variants**

| #                                                           |   |   |         |   |
|-------------------------------------------------------------|---|---|---------|---|
| <b>Matt chrome</b>   Power input: 0.2m cable and GST18 plug |   |   |         |   |
| 931.001                                                     | 1 |   |         | 2 |
| 931.003                                                     |   | 1 |         | 2 |
| 931.009                                                     |   |   | 1 (T13) | 2 |
| <b>Black</b>   Power input: 0.2m cable and GST18 plug       |   |   |         |   |
| 931.101                                                     | 1 |   |         | 2 |
| 931.103                                                     |   | 1 |         | 2 |
| <b>White</b>   Power input: 0.2m cable and GST18 plug       |   |   |         |   |
| 931.201                                                     | 1 |   |         | 2 |
| 931.203                                                     |   | 1 |         | 2 |



Watch the TWIST  
installation video at  
[bachmann.com](http://bachmann.com)



With **an installation depth of just 40 mm**,  
the TWIST is so compact that it is even possible  
to install it above a drawer.

| # |  |  |  |
|---|--|--|--|
|---|--|--|--|

**Stainless steel look** | Power input: 2.0m cable with end sleeves and mounting plug, included

|         |   |   |         |
|---------|---|---|---------|
| 931.000 | 2 |   |         |
| 931.002 |   | 2 |         |
| 931.008 |   |   | 2 (T23) |

**Black** | Power input: 2.0m cable with end sleeves and mounting plug, included

|         |   |   |  |
|---------|---|---|--|
| 931.100 | 2 |   |  |
| 931.102 |   | 2 |  |

**White** | Power input: 2.0m cable with end sleeves and mounting plug, included

|         |   |   |  |
|---------|---|---|--|
| 931.200 | 2 |   |  |
| 931.202 |   | 2 |  |



931.102




931.202



**Hole saw** | For installing the TWIST

|         |                                                               |
|---------|---------------------------------------------------------------|
| 931.900 | In wood/plastic   Cutting depth up to 44 mm   Diameter 105 mm |
| 918.900 | Mounting tool for hole saw with centre drill                  |

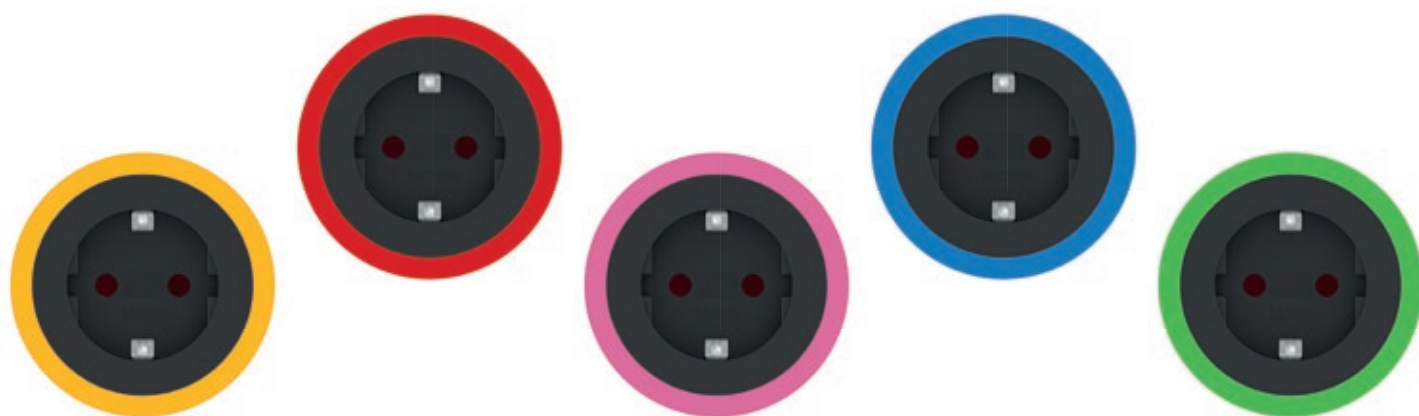

# PIX

The stylish PIX range is a collection of sophisticated, round socket outlet and connector units that can be used in many different ways. On a desk in the office, in the kitchen, in the bathroom, as a lounge element, in the wall or other living room scenarios.

Used alone or in combination, the decorative rings are available in various colours and can be interchanged. With its round, flat shape and minimalist appearance, the PIX meets design requirements exactly where you need it.

## BENEFITS

- Can be integrated on its own or in combination
- Interchangeable, coloured decorative rings
- With swivel-mounted cover as an option
- Simple mounting from above, retrofitting possible too
- Just 45 mm installation depth

**Dimensions (H x Ø)**  
50 x 68 mm

**Installation depth**  
45 mm

**Material**  
Plastic

**Socket colour**  
Black

**Colour variants**


| #                                                                                                                                                               |   |   |         |            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|---------|------------|
| <b>PIX power strip incl. 2 decorative rings (black and white)</b><br>Power input: 0.2m cable and GST18 plug                                                     |   |   |         |            |
| 926.000                                                                                                                                                         | 1 |   |         |            |
| 926.002                                                                                                                                                         |   | 1 |         |            |
| 926.004                                                                                                                                                         |   |   | 1 (T13) |            |
| 926.006                                                                                                                                                         |   |   |         | 1 (3.15 A) |
| <b>PIX power strip incl. 3 decorative rings (black, white and stainless steel look)</b><br>Power input: 2.0m cable with end sleeves and mounting plug, included |   |   |         |            |
| 926.001                                                                                                                                                         | 1 |   |         |            |
| 926.003                                                                                                                                                         |   | 1 |         |            |
| 926.005                                                                                                                                                         |   |   | 1 (T13) |            |
| 926.007                                                                                                                                                         |   |   |         | 1 (13A)    |



PIX decorative rings  
available in **eight colour**  
variants.



926.007

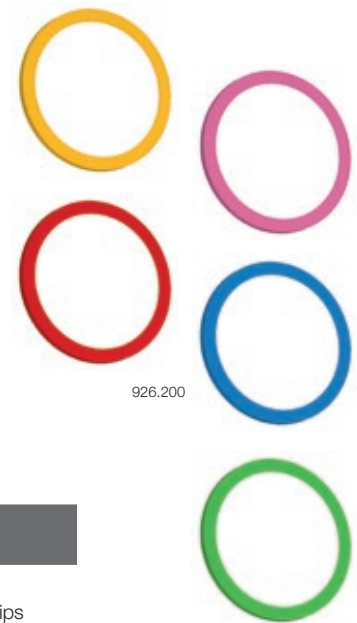

926.200



**PIX classic decorative ring set** | Colourful decorative ring set for interchanging on already present PIX power strips

926.200

1 x melon yellow (RAL1028)  
1 x traffic red (RAL3020)  
1 x yellow green (RAL6018)  
1 x sky blue (RAL5015)  
1 x heather violet (RAL4003)


**PIX cover set** | Swivelling cover with colour-coordinated decorative ring incl. covers for all countries and connection versions

926.101


Cover set in black, similar to RAL9005

926.102

Cover set in white, similar to RAL9010



926.102

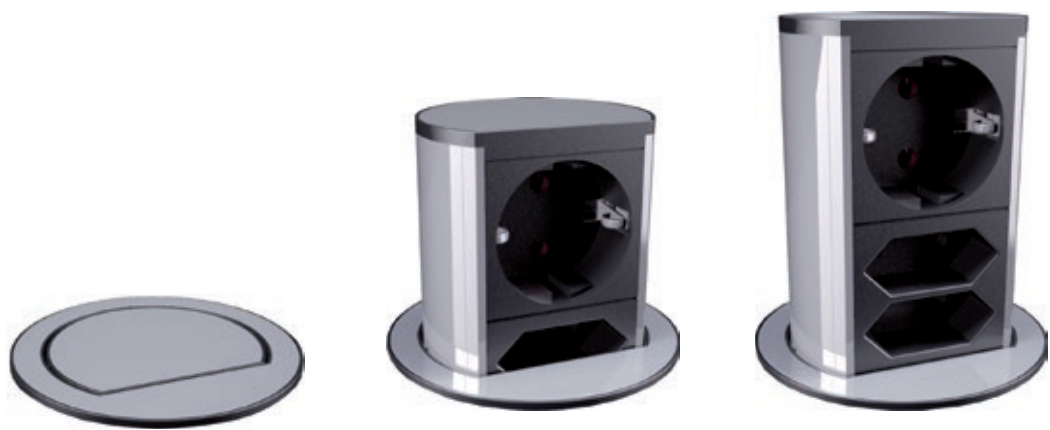

# ELEVATOR

ELEVATOR fits perfectly in any working environment. At 79 mm in diameter, ELEVATOR is ideal for integrating power and data connections in tiny spaces. Simply press down with your finger to raise and lower ELEVATOR.

Installation is incredibly simple. ELEVATOR is placed in a cut-out 79 mm in diameter and secured to the desktop or tabletop from below using a lock ring.

## BENEFITS

- **Press down with your finger to raise**
- **Quick and easy to install**
- **Suitable for retrofitting**
- **Suitable for standard 79 mm hole**



**Dimensions (H x Ø)**  
100 x 79 mm

**Profile**  
material: Aluminium  
Socket material: Plastic

**Socket colour**  
Black

**Colour variants**



| #                                                                                               |  |  |  |  |  |  |  |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Matt chrome</b>   Power input: 0.5m cable and GST18 plug, 3.0m data cables incl. plug/socket |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| 928.004                                                                                         | 1                                                                                   |                                                                                     |                                                                                     |                                                                                       | 90°                                                                                   |                                                                                       | 2 x CAT6                                                                              |
| 928.005                                                                                         | 1                                                                                   |                                                                                     |                                                                                     |                                                                                       | 90°                                                                                   |                                                                                       | 1 x CAT6<br>1 x USB 3.0A                                                              |
| 928.006                                                                                         | 1                                                                                   |                                                                                     |                                                                                     |                                                                                       | 90°                                                                                   |                                                                                       | 1 x CAT6<br>1 x HDMI                                                                  |
| 928.008                                                                                         |                                                                                     | 1                                                                                   |                                                                                     |                                                                                       | 90°                                                                                   |                                                                                       | 2 x CAT6                                                                              |
| 928.009                                                                                         |                                                                                     | 1                                                                                   |                                                                                     |                                                                                       | 90°                                                                                   |                                                                                       | 1 x CAT6<br>1 x USB 3.0A                                                              |
| 928.010                                                                                         |                                                                                     | 1                                                                                   |                                                                                     |                                                                                       | 90°                                                                                   |                                                                                       | 1 x CAT6<br>1 x HDMI                                                                  |
| 928.035                                                                                         |                                                                                     |                                                                                     | 1 (T13)                                                                             |                                                                                       | 90°                                                                                   |                                                                                       | 2 x CAT6                                                                              |
| 928.039                                                                                         |                                                                                     |                                                                                     |                                                                                     | 1 (5 A)                                                                               | 90°                                                                                   |                                                                                       | 1 x CAT6<br>1 x USB 3.0A                                                              |
| 928.026                                                                                         |                                                                                     |                                                                                     |                                                                                     | 1 (5 A)                                                                               | 90°                                                                                   | •                                                                                     |                                                                                       |



Watch the  
ELEVATOR installation  
video  
at [bachmann.com](http://bachmann.com)



**Simply press down**  
with your finger  
to raise and lower  
ELEVATOR.

| # |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|
|---|--|--|--|--|--|--|--|

**Stainless steel look** | Power input: 2.0 m cable with end sleeves and mounting plug, included

|         |   |   |         |          |   |        |   |
|---------|---|---|---------|----------|---|--------|---|
| 928.002 | 2 |   |         |          |   | 90°    |   |
| 928.003 | 1 |   |         |          | 2 | 90°/0° |   |
| 928.007 |   | 2 |         |          |   | 90°    |   |
| 928.024 |   |   | 2 (T23) |          |   | 90°    |   |
| 928.017 | 1 |   |         |          |   | 90°    | • |
| 928.020 |   | 1 |         |          |   | 90°    | • |
| 928.046 |   |   |         | 1 (13 A) |   | 90°    | • |



**Hole saw** | For installing the ELEVATOR

|         |                                                              |
|---------|--------------------------------------------------------------|
| 928.900 | In wood/plastic   Cutting depth up to 44 mm   Diameter 79 mm |
| 918.900 | Mounting tool for hole saw with centre drill                 |



928.005



928.024



# DUE

DUE is the ideal power strip for the kitchen. It guarantees an elegant power supply and can be used just as effectively in the office and in other areas.

With its interchangeable covers, it can be colour-coordinated to its surroundings or create accents as desired, even after installation.

The split cover allows DUE to be slid open as required, with a design that looks equally elegant when in use.

## BENEFITS

- Interchangeable covers available
- Space-saving even when open
- Supplied with installation template
- Just 45 mm installation depth
- Integrated water run-off

**Dimensions when open (WxHxD)**  
141 x 72 x 49 mm

**Material**  
Plastic

**Socket colour**  
Black

**Colour variants**

| # |  |  |  |  |
|---|--|--|--|--|
|---|--|--|--|--|

**DUE power strip** | Power input: 0.2m cable and GST18 plug

|         |   |   |  |     |
|---------|---|---|--|-----|
| 929.010 | 2 |   |  | 90° |
| 929.012 |   | 2 |  | 90° |

**DUE power strip** | Power input: 2.0m cable with end sleeves and mounting plug, included


|         |   |   |          |     |
|---------|---|---|----------|-----|
| 929.000 | 2 |   |          | 90° |
| 929.002 |   | 2 |          | 90° |
| 929.004 |   |   | 2 (13 A) | 90° |

**DUE cover**


|         |                                   |
|---------|-----------------------------------|
| 929.100 | Stainless steel look              |
| 929.101 | Painted black, similar to RAL9005 |
| 929.102 | Painted white, similar to RAL9010 |



929.010



929.100



929.101



929.102



**Space-saving**  
even when open.





# POWER FRAME COVER

POWER FRAME COVER is the elegant and compact power and data supply solution.

The POWER FRAME COVER has an attractive aluminium cover, designed especially for stylish room concepts, which also protects power and data connections from dust and dirt as a matter of course.

When the cover is fully open, both sides of the table or desk offer unimpeded access.

## BENEFITS

- **High-quality design piece for work and living spaces**
- **Accessible from every seat**
- **Protection against dirt and dust**
- **Versatile: can be combined with socket outlets and data, audio and video modules**

## AWARDS



**Dimensions (W x H x D)**  
See table x 88 x 42 mm



**Material**  
Aluminium

**Colour variants**






 Accessible from  
**every seat.**

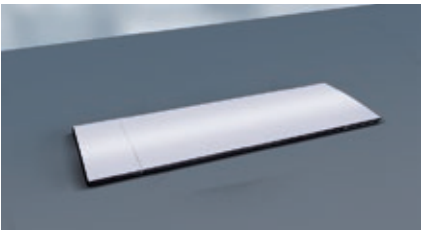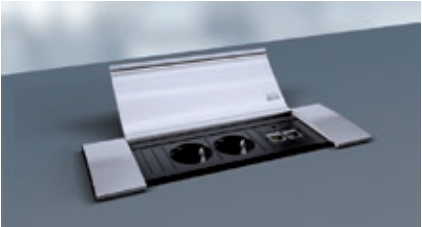

**POWER FRAME COVER – Small** | Width: 255 mm | Aluminium flap with fixed, integrated mounting frame, black (article no. 915.000) for sticking into the table

|         |                                   |
|---------|-----------------------------------|
| 915.500 | Anodised aluminium, E8/EV1        |
| 915.503 | Painted white, similar to RAL9010 |
| 915.501 | Painted stainless steel           |
| 915.022 | Anodised black E1/C35 and brushed |



**POWER FRAME COVER – Medium** | Width: 300 mm | Aluminium flap with fixed, integrated mounting frame, black (article no. 915.004) for sticking into the table

|         |                            |
|---------|----------------------------|
| 915.502 | Anodised aluminium, E8/EV1 |
|---------|----------------------------|

**POWER FRAME COVER – Large** | Width: 383 mm | Aluminium flap with fixed, integrated mounting frame, black (article no. 915.006) for sticking into the table

|         |                            |
|---------|----------------------------|
| 915.504 | Anodised aluminium, E8/EV1 |
|---------|----------------------------|


 Only power strips with **evenly flush custom modules** can be used in conjunction with the POWER FRAME COVER.  
 The **matching power strips** can be found on p. 28.



# POWER FRAME

POWER FRAME is the compact solution for integrated and easily accessible power and data connections for workstations. It can be either factory-installed or supplied for retrofitting.

The power strip clicks into the mounting frame and can be interchanged or fitted with custom modules as required.

## BENEFITS

- **Compact dimensions**
- **Suitable for retrofitting**
- **Timeless design**
- **Versatile in application**
- **Rapid installation of complete power strips**



**Dimensions (W x H x D)**  
See table x 73 x 36 mm

**Mounting frame**  
material: Sheet steel  
Socket material:  
Plastic, aluminium

**Socket colour**  
Black

**Colour variants**



| # |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|
|---|--|--|--|--|--|--|--|

### POWER FRAME Power strip – Small | Power input: 0.2m cable and GST18 plug

|          |   |   |         |            |     |   |  |
|----------|---|---|---------|------------|-----|---|--|
| 916.0040 | 2 |   |         |            | 35° | • |  |
| 916.103  |   | 2 |         |            | 35° | • |  |
| 916.218  |   |   | 2 (T13) |            | 0°  | • |  |
| 916.100  |   |   |         | 2 (3.15 A) | 90° | • |  |

### POWER FRAME Power strip – Medium | Power input: 0.2m cable and GST18 plug

|          |   |   |         |            |     |   |   |
|----------|---|---|---------|------------|-----|---|---|
| 916.0514 | 2 |   |         |            | 35° | • | 1 |
| 916.0411 |   | 2 |         |            | 35° | • | 1 |
| 916.0511 |   |   | 2 (T13) |            | 0°  | • | 1 |
| 916.0519 |   |   |         | 2 (3.15 A) | 90° | • | 1 |

### POWER FRAME Power strip – Large | Power input: 0.2m cable and GST18 plug

|          |   |   |  |            |             |   |   |
|----------|---|---|--|------------|-------------|---|---|
| 916.0703 | 1 | 1 |  | 1 (3.15 A) | 35°/35°/90° | • | 1 |
|----------|---|---|--|------------|-------------|---|---|



Power strip is clicked into place in the mounting frame from underneath **without tools.**



916.0400



#### POWER FRAME Mounting frame – Small | Width: 241 mm

|         |                                 |
|---------|---------------------------------|
| 317.000 | Silver-grey, similar to RAL9006 |
| 317.001 | Stainless steel                 |
| 915.000 | Black, similar to RAL9005       |
| 915.001 | White, similar to RAL9010       |

#### POWER FRAME Mounting frame – Medium | Width: 284 mm

|         |                                 |
|---------|---------------------------------|
| 317.006 | Silver-grey, similar to RAL9006 |
| 915.004 | Black, similar to RAL9005       |
| 915.005 | White, similar to RAL9010       |

#### POWER FRAME Mounting frame – Large | Width: 369 mm

|         |                                 |
|---------|---------------------------------|
| 317.007 | Silver-grey, similar to RAL9006 |
| 915.006 | Black, similar to RAL9005       |
| 915.003 | White, similar to RAL9010       |



317.000



317.001



915.000



915.001



# KAPSA

KAPSA's classic, reduced lines make it a power strip that is both design-orientated and space-saving – designed for the kitchen, office and many other areas.

The cover – which can be flipped open and interchanged – provides protection against external influences and is available in several versions. Three-way, modular equipment options, thereby allowing flexible configuration. Installation from above guarantees simple mounting – also optionally available as a retrofitted solution. A low installation depth of approx. 45 mm and a solid design characterise KAPSA and confirm the well-worn saying: less is more.

## BENEFITS

- **Easily interchangeable cover available in various versions**
- **Simple installation from above**
- **Three-way, modular equipment options**
- **Just 45 mm installation depth**
- **Aluminium cover with high-quality feel**



**Dimensions (W x H x D)**  
204 x 71 x 51 mm

**Cover**  
material: Aluminium  
Socket material:  
Plastic, aluminium

**Socket colour**  
Black

**Colour variants**



| # |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|
|---|--|--|--|--|--|--|--|--|

### KAPSA power strips – Medium

Power input: 0.2m cable and GST18 plug

|         |   |   |         |            |     |   |   |
|---------|---|---|---------|------------|-----|---|---|
| 927.051 | 2 |   |         |            | 35° | • |   |
| 927.054 |   | 2 |         |            | 35° | • |   |
| 927.060 |   |   | 2 (T13) |            | 0°  | • |   |
| 927.057 |   |   |         | 1 (3.15 A) | 90° | • | 1 |
| 927.052 | 2 |   |         |            | 35° |   | 1 |
| 927.055 |   | 2 |         |            | 35° |   | 1 |
| 927.061 |   |   | 2 (T13) |            | 0°  |   | 1 |
| 927.058 |   |   |         | 2 (3.15 A) | 90° |   | 1 |



Cover can be  
interchanged and easily  
**retrofitted.**



| # |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|
|---|--|--|--|--|--|--|--|

#### KAPSA power strips – Medium

Power input: 2.0m cable with end sleeves and mounting plug

|         |   |   |         |          |     |   |   |
|---------|---|---|---------|----------|-----|---|---|
| 927.000 | 3 |   |         |          | 35° |   |   |
| 927.003 |   | 3 |         |          | 35° |   |   |
| 927.006 |   |   |         | 3 (13 A) | 90° |   |   |
| 927.009 |   |   | 3 (T13) |          | 0°  |   |   |
| 927.001 | 2 |   |         |          | 35° | • |   |
| 927.004 |   | 2 |         |          | 35° | • |   |
| 927.010 |   |   | 2 (T13) |          | 0°  | • |   |
| 927.002 | 2 |   |         |          | 35° |   | 1 |
| 927.005 |   | 2 |         |          | 35° |   | 1 |
| 927.008 |   |   |         | 2 (13 A) | 90° |   | 1 |
| 927.011 |   |   | 2 (T13) |          | 0°  |   | 1 |



#### KAPSA cover – Medium

|         |                                      |
|---------|--------------------------------------|
| 927.100 | Stainless steel look                 |
| 927.101 | Painted in black, similar to RAL9005 |
| 927.102 | Painted in white, similar to RAL9010 |
| 927.103 | Anodised silver-grey, E6/EV1         |



Only power strips with  
**evenly flush custom  
modules** can be used  
in conjunction with  
the KAPSA.



# CONI DUO

CONI DUO is ideal for narrow conference and training desks and tables. CONI DUO provides simple and unimpeded access to power, media and data connections on the table or desk from two sides. There is no reduction in leg room under the desk or table.

When not in use, CONI DUO integrates fully into the surface of the desk or table. Cables can be very easily routed through the opening: this is also possible when it is closed thanks to the black brush insert.

## BENEFITS

- **Access from two opposite sides**
- **Just one desk or table cut-out needed**
- **Integrated into the top of the desk or table**
- **Minimal installation depth, robust frame design**
- **Integrated brush insert for closing once cables have been plugged in**



**Dimensions (W x H x D)**  
782 x 151 x 58 mm

**Mounting frame**  
material: Sheet steel  
Socket material:  
Plastic, aluminium

**Socket colour**  
Black

**Colour variants**



| #        |   |   |         |            |     |   |   |
|----------|---|---|---------|------------|-----|---|---|
| 912.003  | 2 |   |         |            | 35° |   | 1 |
| 912.010  |   | 2 |         |            | 35° |   | 1 |
| 912.015  |   |   | 3 (T13) |            | 0°  |   | 1 |
| 912.045  |   |   |         | 2 (3.15 A) | 90° |   | 1 |
| 912.0167 | 1 |   |         |            | 35° | • | 1 |
| 912.0171 |   | 1 |         |            | 35° | • | 1 |
| 912.0991 |   |   | 1 (T13) |            | 0°  | • | 1 |
| 912.1781 |   |   |         | 1 (3.15 A) | 90° | • | 1 |



912.003



912.0167



Access from  
two **opposite**  
**sides.**



#### CONI DUO mounting frame – 2x small

911.026 Silver-grey, similar to RAL9006

911.028 White, similar to RAL9010





# CONI

CONI brings flexibility to the desktop, for example in conference and training rooms. CONI facilitates unrestricted individual access to power, media and data right on the tabletop or desktop.

Minimal installation depth means that CONI provides ample leg room under the desk or table, even where the units are fitted near the edge. A wide range of standard surface finishes also provides the freedom to design.

## BENEFITS

- **Integrated into the top of the desk or table**
- **Minimal installation depth, robust frame design**
- **Integrated brush insert for closing once cables have been plugged in**
- **Power strip can be interchanged quickly**
- **Suitable for retrofitting**



**Dimensions (W x H x D)**  
248 x 151 x 58 mm

**Mounting frame**  
material: Sheet steel  
Socket material:  
Plastic, aluminium

**Socket colour**  
Black

**Colour variants**



| #        |   |   |         |            |  |     |   |   |
|----------|---|---|---------|------------|--|-----|---|---|
| 912.003  | 2 |   |         |            |  | 35° |   | 1 |
| 912.010  |   | 2 |         |            |  | 35° |   | 1 |
| 912.015  |   |   | 3 (T13) |            |  | 0°  |   | 1 |
| 912.045  |   |   |         | 2 (3.15 A) |  | 90° |   | 1 |
| 912.0167 | 1 |   |         |            |  | 35° | • | 1 |
| 912.0171 |   | 1 |         |            |  | 35° | • | 1 |
| 912.0991 |   |   | 1 (T13) |            |  | 0°  | • | 1 |
| 912.1781 |   |   |         | 1 (3.15 A) |  | 90° | • | 1 |



**Integrated  
brush insert**  
for closing once  
cables have  
been plugged in.



912.003




912.0167



#### CONI mounting frame – Small

|          |                                 |
|----------|---------------------------------|
| 338.0203 | Silver-grey, similar to RAL9006 |
| 911.000  | White, similar to RAL9010       |
| 911.002  | Black, similar to RAL9005       |



338.0203



911.002



# DESK 2

DESK 2 is a multiple-socket outlet that can be equipped with various communication modules. It has been designed for flexible use in the office, meeting rooms, home offices or desk-sharing environments.

The multiple-socket outlet is made from aluminium and is available in various colours. The connections are screwed onto the standardised module windows and can be easily changed over.

## BENEFITS

- **Design solution for modern workstations**
- **User-focused 35° orientation**
- **No hole required in the top of the table or desk**
- **Covered wiring to the edge of a desk or table**
- **Custom versions for future-proofing**

## AWARDS



reddot design award  
winner 2011



German  
Design Award  
2012  
NOMINEE



iF  
product  
design award  
2012



### Dimensions (W x H x D)

See table x 86 x 100 mm

### Profile

material: Aluminium  
Socket material: Plastic

### Socket colour

Black

### Colour variants



| # |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|
|---|--|--|--|--|--|--|--|--|

**White** | Power input: 0.2m cable and GST18 plug | Incl. mounting bracket

|          |   |   |         |            |             |   |   |        |
|----------|---|---|---------|------------|-------------|---|---|--------|
| 902.319  | 2 |   |         |            | 35°         | • |   | 198 mm |
| 902.3670 |   | 2 |         |            | 35°         | • |   | 198 mm |
| 902.3120 |   |   | 2 (T13) |            | 90°         | • |   | 240 mm |
| 902.3350 |   |   |         | 2 (3.15 A) | 90°         | • |   | 240 mm |
| 902.228  | 2 |   |         |            | 35°         | • | 1 | 242 mm |
| 902.232  |   | 2 |         |            | 35°         | • | 1 | 242 mm |
| 902.249  |   |   | 2 (T13) |            | 0°          | • | 1 | 261 mm |
| 902.231  |   |   |         | 2 (3.15 A) | 90°         | • | 1 | 285 mm |
| 902.2820 | 1 | 1 |         | 1 (3.15 A) | 35°/35°/90° | • | 1 | 346 mm |



A real head-  
turner thanks to  
its **high-quality  
design.**

| # |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|
|---|--|--|--|--|--|--|--|--|

**Stainless steel** | Power input: 0.2 m cable and GST18 plug | Incl. mounting bracket

|          |   |   |         |            |             |   |   |        |
|----------|---|---|---------|------------|-------------|---|---|--------|
| 902.545  | 2 |   |         |            | 35°         | • |   | 198 mm |
| 902.5430 |   | 2 |         |            | 35°         | • |   | 198 mm |
| 902.591  |   |   | 2 (T13) |            | 90°         | • |   | 240 mm |
| 902.5280 |   |   |         | 2 (3.15 A) | 90°         | • |   | 240 mm |
| 902.428  | 2 |   |         |            | 35°         | • | 1 | 242 mm |
| 902.432  |   | 2 |         |            | 35°         | • | 1 | 242 mm |
| 902.469  |   |   | 2 (T13) |            | 90°         | • | 1 | 261 mm |
| 902.431  |   |   |         | 2 (3.15 A) | 90°         | • | 1 | 285 mm |
| 902.494  | 1 | 1 |         | 1 (3.15 A) | 35°/35°/90° | • | 1 | 346 mm |



902.228



902.231



**DESK 2 cable guide** | Covered cable guide to the underside of the table or desk surface | Plastic

|         |                         |
|---------|-------------------------|
| 918.106 | Painted white           |
| 918.107 | Painted stainless steel |



918.106

**DESK 2 adhesive base**

|         |                                                                                  |
|---------|----------------------------------------------------------------------------------|
| 918.110 | 2x adhesive base set   Plastic   Painted white<br>2x TESA POWER STRIP®           |
| 918.111 | 2x adhesive base set   Plastic   Painted stainless steel<br>2x TESA POWER STRIP® |



918.110



918.111



# DESK 1

DESK is the ideal solution for data, media and power management wherever workstations need to be flexible.

Typical situations might include meeting rooms, home offices or desk-sharing environments.

The modular construction of DESK enables it to be factory-configured with exactly the communications and power connections required for specific workstations and applications.

For the power supply, there is therefore a free choice of either the flexible Wieland connector system or permanent connections. The data connections are fitted with adapters as standard, but can likewise also be fixed connections.

## BENEFITS

- **Flexibility of use regardless of location**
- **With Wieland connector system or fixed cable connections**
- **Fixed or free-standing on desk/table**
- **Custom versions for future-proofing**



### Dimensions (W x H x D)

See table x 73 x 93 mm

### Profile

material: Aluminium  
Socket material: Plastic

### Socket colour

Black

### Colour variants




| # |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|
|---|--|--|--|--|--|--|--|--|

**Anodised aluminium profile** | Power input/output: GST18

|          |   |   |         |            |             |   |   |        |
|----------|---|---|---------|------------|-------------|---|---|--------|
| 902.0192 | 2 |   |         |            | 35°         | • |   | 239 mm |
| 902.068  |   | 2 |         |            | 35°         | • |   | 239 mm |
| 902.1992 |   |   | 2 (T13) |            | 0°          | • |   | 239 mm |
| 902.166  |   |   |         | 2 (3.15 A) | 45°         | • |   | 274 mm |
| 902.0182 | 2 |   |         |            | 35°         | • | 1 | 282 mm |
| 902.0185 |   | 2 |         |            | 35°         | • | 1 | 282 mm |
| 902.0578 |   |   | 2 (T13) |            | 0°          | • | 1 | 277 mm |
| 902.0184 |   |   |         | 2 (3.15 A) | 45°         | • | 1 | 317 mm |
| 902.0740 | 1 | 1 |         | 1 (3.15 A) | 35°/35°/90° | • | 1 | 365 mm |



**Individual  
equipment**  
entirely according  
to your wishes.

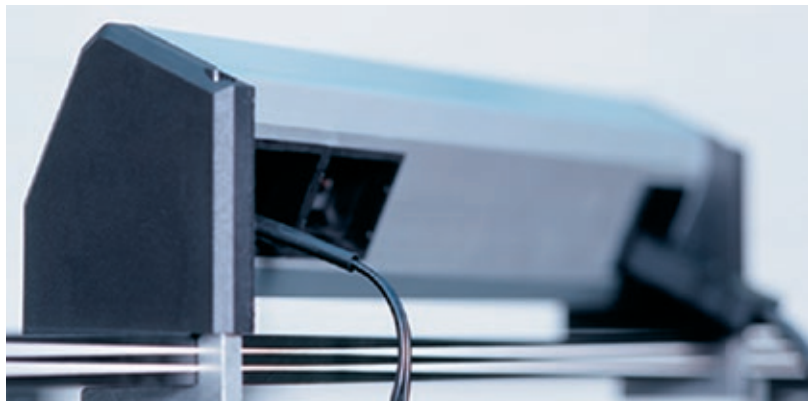

902.0182




902.0184



**DESK 1 mounting bracket** | For desktop thickness of up to 50 mm

930.120


Anodised aluminium profile | Material thickness approx. 9 mm  
Contents: 2 x mounting clamps, 2 x Allen bolts M5 x 60 mm



HDBaseT receiver



HDMI cable  
(max. 5m)



HDBaseT  
(min. CAT5e,  
CAT6 or CAT7  
– max. 70m)

HDMI cable  
(max. 5m)



← OR →

HDBaseT transmitter



Connection cable  
(DisplayPort,  
HDMI, VGA + audio,  
signal switching)

DisplayPort digital



Custom  
modules



HDMI digital



VGA analogue



# HDBASE T

Share information from up to four devices (laptops) at the touch of a button.

The buttons are already integrated into the relevant custom modules. The signals from the changeover switch to the display or projector are either transferred via HDBaseT or as original HDMI signals.

## BENEFITS

- **Zero-loss transmission of image and sound signals via CAT cable up to 70 metres**
- **Simple cabling**
- **Plug & play**
- **No programming needed**
- **Resolution up to UHD (4K) possible**

### HDBaseT switch

**HDBaseT transmitter – with 3 inputs**  
 Input: 2x HDMI, 1x VGA + audio  
 Output: HDMI + HDBaseT via RJ45  
 Max. 70 metre cable length  
 Incl. control box

**HDBaseT transmitter – with 4 inputs**  
 Input: 2x HDMI, 1x VGA + audio, 1x DisplayPort  
 Output: HDMI + HDBaseT via RJ45  
 Max. 70 metre cable length  
 Incl. control box

**HDBaseT receiver**  
 Input: HDBaseT via RJ45  
 Output: HDMI, HDCP compatible

### Custom modules for integration into our desk connection panels

**VGA, analogue** | Miniature jack and button  
 1x VGA 15-pin socket/plug  
 1x 3.5mm miniature jack, socket/plug  
 1x blue illuminated button with RJ12 plug  
 Cable lengths 1 m

**DisplayPort, digital** | Button  
 1x DisplayPort socket/plug  
 1x blue illuminated button with RJ12 plug  
 Cable lengths 1 m

**HDMI, digital** | Button  
 1x HDMI socket/plug  
 1x blue illuminated button with RJ12 plug  
 Cable lengths 1 m



### Mounting bracket

903.203 Mounting bracket for HDBaseT transmitter | x 2

### VGA cabling, analogue

VGA combi cable, 15-pin HD with miniature jack | Black | VGA plug 15 HD | 3.5 mm miniature jack plug

918.066 Length 1 m

### DisplayPort cabling, digital

DisplayPort connection cable | Black | 4K x 2K | DisplayPort plug

918.0951 Length 1 m

### HDMI cabling, digital | HDMI connection cable | Black | 4K x 2K | HDMI plug, 19-pin


918.0191 Length 1 m

918.0192 Length 3 m

918.0193 Length 5 m



**More accessories**  
 are available in our catalogues and on request.

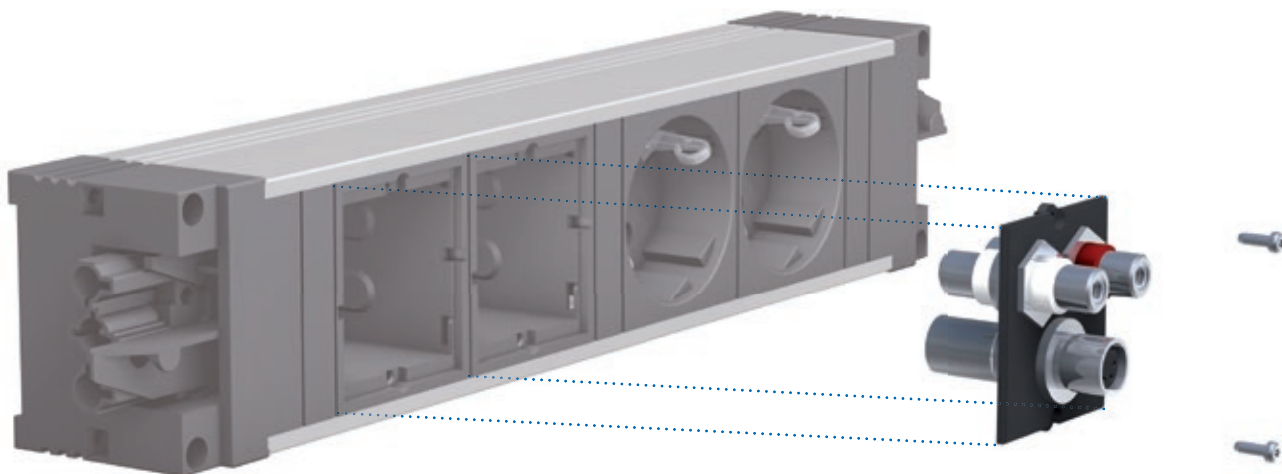

# CUSTOM MODULES

Custom modules are the central components of video, audio and network connections. Their construction offers you simple and flexible installation in all areas.

With the easy-to-swap modules, you can create units to meet the individual data, video and audio connection requirements of your customers quickly and simply.

## BENEFITS

- **Customisation of workstations**
- **Easily interchangeable**
- **High flexibility**



917.000



917.001



### Custom module

Module that is screwed into an empty slot on a power strip.



### Keystone module

Module that is inserted into a custom module using a keystone mount.

| #       | C                                                                                                                                                          |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 917.000 | <b>Custom module – 2x keystone mount</b><br>Module, black, accepts 2 data sockets with keystone fitting<br>Suitable for the data sockets listed below      |
| 917.001 | <b>Custom module – 1x keystone mount</b><br>Module, black, accepts 1 data socket with keystone fitting<br>Suitable for the data sockets listed below       |
| 917.222 | <b>Custom module – VGA, jack, HDMI</b><br>Breakout cables 0.2 m, socket-socket, for VGA, audio (3.5 mm stereo jack)<br>HDMI mounting using a keystone clip |



Data, video and audio connections  
**entirely according to your wishes.**



**Further custom modules** can be found in our catalogues and on request.



| #       | K                                                                                                                                                                                                           |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 940.083 | <b>Keystone module CAT6 coupler/socket/socket</b><br>Front: RJ45 (keystone fixing)   Rear: RJ45 (keystone fixing)   Shielded                                                                                |
| 918.041 | <b>Keystone module 1 x HDMI 2.0</b><br>Front: HDMI socket   Rear: HDMI, without cable   Transmission possible up to a resolution of 3840x216 (UHD/4K)   Approx. 85mm required installation depth            |
| 917.120 | <b>Keystone module USB 3.0 A/A (straight-through)</b><br>Front: USB socket A   Rear: USB socket A   Fits into keystone frame 917.000 or 917.001<br>Requires approx. 85mm installation depth                 |
| 917.157 | <b>Keystone module 1 x 3.5mm miniature jack</b><br>Front: 3.5mm stereo miniature jack socket   Rear: 3.5mm stereo miniature jack socket with approx. 0.2m cable<br>Requires approx. 65mm installation depth |





# WIRELESS CHARGER

The WIRELESS CHARGER allows all Qi-capable mobile devices to be charged. No plugs, no irritating cables – the smartphone or tablet is simply and conveniently placed onto the charging module to charge.

The WIRELESS CHARGER can be very easily and quickly integrated into a wide range of table surfaces. The WIRELESS CHARGER is placed into a cut-out 79 mm in diameter and secured from below in the table surface using clamping claws.

## BENEFITS

- **Wireless charging station**
- **For installation in desktops and tabletops**
- **With USB charger included**



Charge a  
smartphone  
**without  
cables.**

#

**Wireless Charger** | Black plastic housing | Power input 1.5m cable with USB A connection

934.000 | Charging standard: WPC1.1 | Input: 5 V | Output: 5 V | Charging distance: 4-6 mm | For a 79 mm standard hole



# POWER SUPPLY CABLES

Cables fitted with Wieland GST18 plug-in connectors are available to connect Facility products to the mains power supply. The benefits of these cables and their connectors, which are used all over the world, are flexibility in terms of length, the possibility of interchanging them should length requirements change, and availability for a variety of countries. Even extending the power supply to other power strips presents no problem and can usually be done without tools.



**wieland**

#

## GST18 earthing contact

Colour: Black | Cable: H05VV-F 3G 1.5mm<sup>2</sup> | End 1: Right-angled earthing contact plug | End 2: Wieland GST18 socket

375.075 Length 2.0m

375.003 Length 3.0m

375.007 Length 5.0m



375.075

## CH/Switzerland plug

Colour: Black | Cable: H05VV-F 3G 1.5mm<sup>2</sup> | End 1: CH/Switzerland plug | End 2: Wieland GST18 socket

375.016 Length 1.5m

375.017 Length 3.0m

375.018 Length 5.0m



375.016

## UK 13 SA plug

Colour: Black | Cable: H05VV-F 3G 1.5mm<sup>2</sup> | End 1: UK 13 A plug | End 2: Wieland GST18 socket

375.068 Length 2.0m

375.069 Length 3.0m

375.0048 Length 5.0m



375.068

# SERVICE



[www.bachmann.com](http://www.bachmann.com)

**BACH  
MANN**  
It's electric.



Download our  
**full catalogue**  
for free on our  
website.



**Bachmann GmbH**  
Ernstthaldenstr. 33  
70565 Stuttgart | Germany



+49 711 86602-0



+49 711 86602-34

## ABOUT US

1947

The year BACHMANN was founded

More than 700

employees

Over 2.000

standard products from four market segments

20

different design awards

25

trading partners worldwide

## BACHMANN makes connections

### IT POWER

19" multiple-socket outlets  
Connector strips  
IT power supply  
Distributors  
BlueNet

### FACILITY

Connector panels  
Multiple-socket outlets  
Data cables  
Audio and video cables  
Power cables  
Cable management  
Network and media technology  
Radio and Wi-Fi solutions  
Custom Modules

### INSTALLATION

Tradesman's strips  
Multiple-socket outlets  
Power cables  
Distributors  
Adapters  
Plugs/couplers  
Electrotechnical accessories  
Lamps

### KITCHEN

Connector panels  
Multiple-socket outlets  
Data cables  
Power cables  
Distributors



**Bachmann GmbH**  
Ernstthaldenstr. 33  
70565 Stuttgart | Germany



+49 711 86602-0



+49 711 86602-34



[www.bachmann.com](http://www.bachmann.com)

# Pictograms and their meaning



Article number



Socket orientation



Socket outlet with earthing contact



Dual USB charger



UTE socket



Custom module



Swiss socket



Keystone module



UK socket



Width of the product



European socket



Accessories/extras

## Further information



### Custom module

Module that is screwed into an empty slot on a power strip.



### Keystone module

Module that is inserted into a custom module using a keystone mount.



All power strips feature increased protection against contact.



For reasons related to the production process, there may be very minor deviations from the specified dimensions. We thank you for your understanding in this matter.