





# MINI OCTOPUS

## SURFACE AND RECESSED INSTALLATION


Flexible recessed or surface mounted LED Strip with special fixing clips (not included) for maximum flexibility creating a variety of shapes, thanks also to the only 4mm width. Available also with an IP65 protection, it can be installed in damp environments (eg bathroom). Available in three lengths (1, 3, 6m), it can be cut every 25mm. The LED source is available in Natural (4000K), Warm (3000K) or Emotion Dual Color color temperature, which allows the variation from 3000K to 4000K.



# MINI OCTOPUS

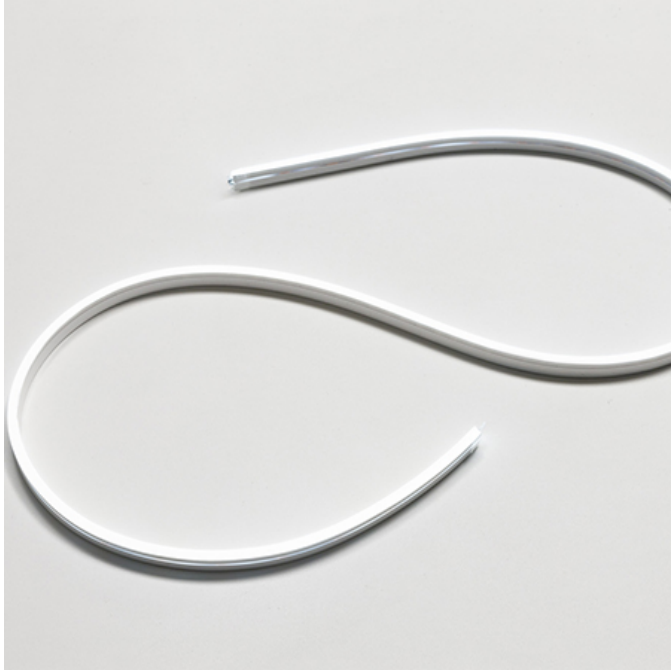

\* Connection cord L=3m INCLUDED

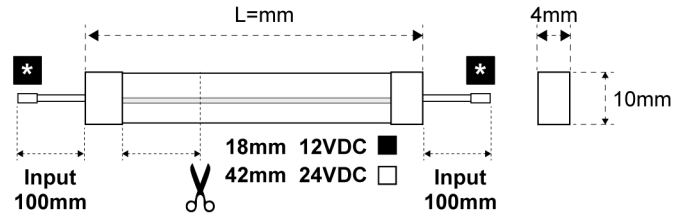

## Finish

<sup>01</sup>  
White



- optic designed to ensure uniform light diffusion
- can be cut
- recessed installation
- clips available for surface mounting

## MINI OCTOPUS

29000010102ZW	<input type="checkbox"/> <sup>01</sup>	1 input	8W/m	L 1000mm	Warm White	IN: 12 VDC
29000020102ZW	<input type="checkbox"/> <sup>01</sup>	2 input	8W/m	L 3000mm	Warm White	IN: 12 VDC
29000030102ZW	<input type="checkbox"/> <sup>01</sup>	2 input	8W/m	L 6000mm	Warm White	IN: 12 VDC
29000300101ZW	<input type="checkbox"/> <sup>01</sup>	1 input	8W/m	L 1000mm	Warm White	IN: 24 VDC
29000300101ZN	<input type="checkbox"/> <sup>01</sup>	1 input	8W/m	L 1000mm	Natural White	IN: 24 VDC
29000310101ZW	<input type="checkbox"/> <sup>01</sup>	2 input	8W/m	L 3000mm	Warm White	IN: 24 VDC
29000310101ZN	<input type="checkbox"/> <sup>01</sup>	2 input	8W/m	L 3000mm	Natural White	IN: 24 VDC
29000320101ZW	<input type="checkbox"/> <sup>01</sup>	2 input	8W/m	L 6000mm	Warm White	IN: 24 VDC
29000320101ZN	<input type="checkbox"/> <sup>01</sup>	2 input	8W/m	L 6000mm	Natural White	IN: 24 VDC

## Power supply and control




### MEC DRIVER

For the selection of the power supply system scan or click the QR code.





### SMART SYSTEM

For the choice of control system (only for lights without integrated controls) scan or click the QR code.




VERS.	1000mm NW
A°	100°
B - Lux	540
C - Lux	280
D - Lux	100
LUMEN	304
LUMEN / W	38
CRI	>80

# MINI OCTOPUS EDC

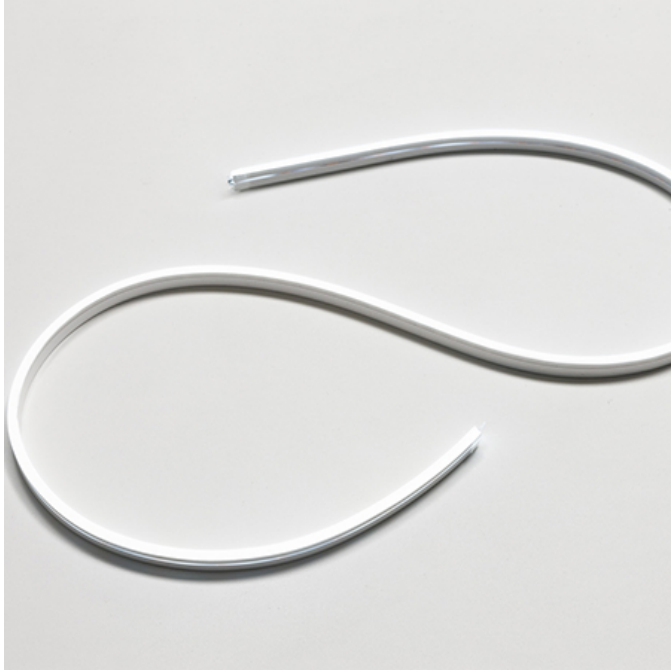

\* Connection cord L=3m INCLUDED

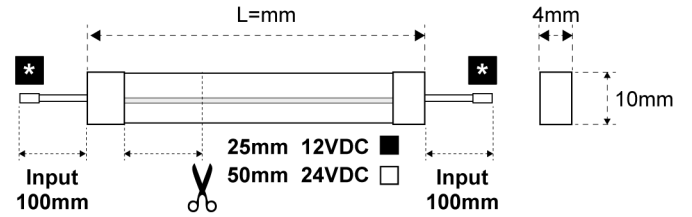

## Finish

<sup>01</sup>  
White



- optic designed to ensure uniform light diffusion
- can be cut
- recessed installation
- clips available for surface mounting

- supplied with Emotion system: the colour temperature varies from "warm" to "natural"

## MINI OCTOPUS EDC

29000010102ZD		1 input	10W/m	L 1000mm	3000K+4000K	IN: 12 VDC
29000020102ZD		2 input	10W/m	L 3000mm	3000K+4000K	IN: 12 VDC
29000030102ZD		2 input	10W/m	L 6000mm	3000K+4000K	IN: 12 VDC
29000300101ZD		2 input	10W/m	L 1000mm	3000K+4000K	IN: 24 VDC
29000310101ZD		2 input	10W/m	L 3000mm	3000K+4000K	IN: 24 VDC
29000320101ZD		2 input	10W/m	L 6000mm	3000K+4000K	IN: 24 VDC

## Power supply and control




### MEC DRIVER

For the selection of the power supply system scan or click the QR code.





### SMART SYSTEM

For the choice of control system (only for lights without integrated controls) scan or click the QR code.



VERS.	1000mm EDC
A°	100°
B - Lux	450
C - Lux	190
D - Lux	80
LUMEN	205
LUMEN / W	28
CRI	>80

# MINI OCTOPUS ACCESSORIES



## Finish






## PROFILE

13300821000



Profile L 2200mm C



## Finish



Transparent

## CLIPS

13200310000



Horizontal A

13201950000




Vertical B

# EXTENSION CORD



12VDC

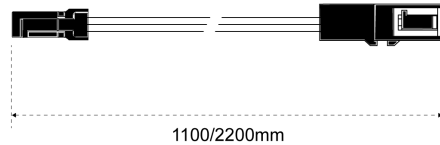

## Finish



## EXTENSION CORD 12VDC

12604220000



12 VDC L 1100mm IN: 12 VDC


12604230000



12 VDC L 2200mm IN: 12 VDC



24VDC

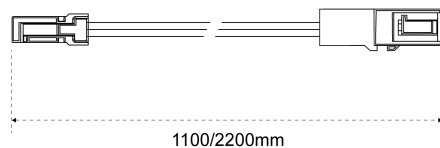

## Finish




## EXTENSION CORD 24VDC

12604630000



24 VDC L 1100mm IN: 24 VDC

24VDC

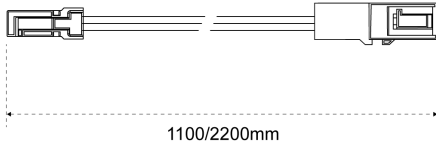

Finish



White



EXTENSION CORD 24VDC

12604620000



24 VDC L 2200mm IN: 24 VDC

CABLE COVER

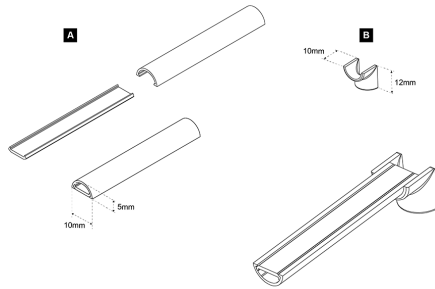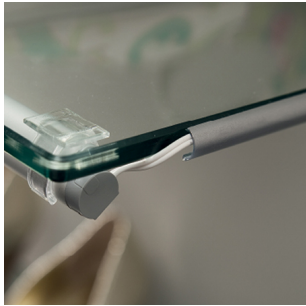

Finish



White



Black



Metallic grey

CABLE COVER

1220896\_\_00



600mm L 600mm A

1220062\_\_00



1200mm L 1200mm A

13201056500



B